

LANE	PLACE	TIME
1	4	14:54.63
2	6	15:01.39
3	5	14:56.24
4	2	14:48.17
5	1	14:47.80
6	3	14:50.76

## SW-5206 AQUATICS MULTISPORT SCOREBOARD SPECIFICATIONS

This six-line LED (light emitting diode) aquatics scoreboard displays LANE, PLACE and TIME information. The scoreboard is shown in swimming mode. Captions for diving and water polo are also included (see illustrations on the last page). The scoreboard is available in indoor 120 V AC (-13), indoor 230 V AC (-14), outdoor 120 V AC (-11) and outdoor 230 V AC (-12) models.

### PRODUCT SPECIFICATIONS

#### PRODUCT SAFETY

##### APPROVAL:

ETL listed and tested to CSA standards  
CE label pending

##### DIMENSIONS:

Height 8'-2", Width 9'-0", Depth 6" (2489 mm, 2743 mm, 152 mm)

##### WEIGHT:

290 lb (132 kg)

##### POWER:

800 W maximum, 120 V AC (2.5 A) or 230 V AC (1.3 A)  
configurations are available

##### CONSTRUCTION:

Durable, lightweight aluminum for excellent corrosion resistance  
Shipped in six sections

##### DIGITS:

All digits are 10" (254 mm) high, with seven bar segments per digit. Indoor and outdoor digits are red, amber or alternating rows of amber and red. All digits consist of PanaView® LEDs.

##### CAPTIONS:

All captions and colons are 5" (127 mm) high and composed of white vinyl. LANE and PLACE captions are applied directly to changeable panels. TIME caption is applied directly to the display face.

##### CABINET COLOR:

Finish is acrylic black

## SW-5206 PRODUCT SPECIFICATIONS (CONTINUED)

**OPERATING TEMPERATURES:** Display: 32 to 122 degrees Fahrenheit (0 to 50 degrees Celsius) Controller: 32 to 122 degrees Fahrenheit (0 to 50 degrees Celsius)

**COMPATIBILITY:** The SW-2000 series scoreboards can be controlled by Daktronics OmniSport® 1000, 2000 or 6000 controllers.

**WARRANTY/SERVICE PLAN:** Exclusive Daktronics Gold® plan in the U.S. and Canada (see SP10093 for more information).

**CONTROL CABLE:** A two conductor shielded communication control cable of 22 AWG minimum is required.


**JUNCTION BOX:** A cover plate with mounted 1/4" stereo phono connector and standard 2" x 2" x 4" (51 mm, 51 mm, 102 mm) outlet box is provided. The connector mates with the connector from the scoreboard control console or external scoreboard interface.

**GENERAL INFORMATION:** Each scoreboard section comes completely assembled. 100% solid state electronics housed in an all aluminum cabinet.

**OPTIONS:**

1. Auxiliary modules to display team scores, event, and heat.
2. Logo/sponsor panel (Standard Sizes: Height 1'-2" by Width 9'-0"; Height 1'-9" by Width 9'-0"; and Height 2'-4" by Width 9'-0")
3. Alternate caption colors available (see SL06409)

## SW-5206 PRODUCT SPECIFICATIONS (CONTINUED)

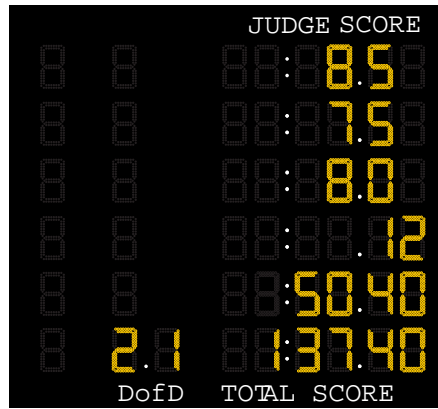

**SW-5206 Diving Mode**



**SW-5206 Water Polo Mode**

*Gold® and OmniSport® are registered trademarks of Daktronics, Inc. Colorado Time Systems®, Omega®, Scan'O'Vision™ and FinishLynx® are registered trademarks of the owners.*

